



MODEL: GT-BD01B

| | |
|----------------------------|---|
| Oder Code | GT-BD01B |
| LED | 3W/Pcs Osram |
| Row | Dual Row |
| Operating Voltage | 10-30V DC |
| Operating Temp | -40~+60 °Celcius |
| Beam Pattern | Flood, Spot, Combo |
| ColorTemperature | 5700K |
| Lifetime | 30000+h |
| Lens Material | Polycarbonate |
| Housing Material | Aluminum |
| Coating Powder | Sand Black |
| Mounting System | 304 Stainless Steel Side Mount Aluminum Bottom Mount |
| Pressure Equalization Vent | Yes |
| Waterproof Rate | IP67 |
| EMC Protection | ECE R10, ECE R112 |

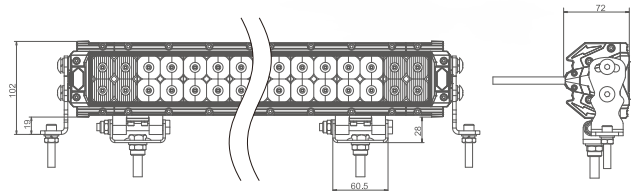

Plastic Decorative Part:
Different Colors Are Available

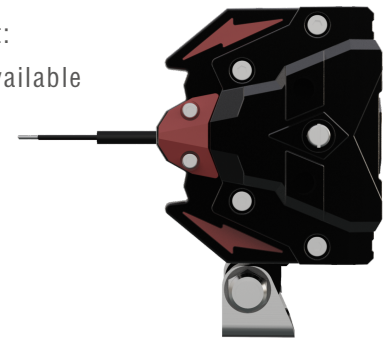

| MODEL | Size | Watt | AMP Draw | Leds | Theoretical Lumen | Cable Length | Net Weight | Package Standard |
|---------------|--------|------|------------------------|--------------|-------------------|--------------|------------|------------------|
| GT-BD01B-12L | 7.99" | 36W | 2.50A@12V, 1.25A@24V | 12PCS*3W P7 | 4080Lm | 400mm | 1.10Kg/Pcs | 6Pcs/Carton |
| GT-BD01B-20L | 11.96" | 60W | 4.10A@12V, 2.05A@24V | 20PCS*3W P7 | 6800Lm | 400mm | 1.55Kg/Pcs | 6Pcs/Carton |
| GT-BD01B-24L | 13.97" | 72W | 5.00A@12V, 2.50A@24V | 24PCS*3W P7 | 8160Lm | 800mm | 1.75Kg/Pcs | 4Pcs/Carton |
| GT-BD01B-40L | 21.96" | 120W | 8.30A@12V, 4.15A@24V | 40PCS*3W P7 | 13600Lm | 800mm | 2.60Kg/Pcs | 4Pcs/Carton |
| GT-BD01B-52L | 27.91" | 156W | 10.80A@12V, 5.40A@24V | 52PCS*3W P7 | 17680Lm | 800mm | 3.20Kg/Pcs | 2Pcs/Carton |
| GT-BD01B-60L | 31.90" | 180W | 12.50A@12V, 6.25A@24V | 60PCS*3W P7 | 20400Lm | 800mm | 3.75Kg/Pcs | 2Pcs/Carton |
| GT-BD01B-80L | 41.80" | 240W | 16.60A@12V, 8.30A@24V | 80PCS*3W P7 | 27200Lm | 800mm | 4.75Kg/Pcs | 2Pcs/Carton |
| GT-BD01B-96L | 49.80" | 288W | 20.00A@12V, 10.00A@24V | 96PCS*3W P7 | 32640Lm | 800mm | 5.53Kg/Pcs | 3Pcs/Carton |
| GT-BD01B-100L | 51.85" | 300W | 20.80A@12V, 10.40A@24V | 100PCS*3W P7 | 34000Lm | 800mm | 5.75Kg/Pcs | 4Pcs/Carton |