




MODEL: GT-BS01A

Oder Code	GT-BS01A
LED	12W/Pcs
Row	Single Row
Optic System	Side Emitting Reflector
Operating Voltage	10-30V DC
Operating Temp	-40~+60 °Celcius
Beam Pattern	Driving Light Beam
ColorTemperature	6000K
Lifetime	30000+h
Lens Material	Polycarbonate
Housing Material	Aluminum
Housing Height	66mm
Coating Powder	Sand Black
Mounting System	304 Stainless Steel Side Mount Aluminum Bottom Mount
Pressure Equalization Vent	Yes
Waterproof Rate	IP67
EMC Protection	ECE R10, CISPR 25 Class 3
Beam Type Protection	ECE R112

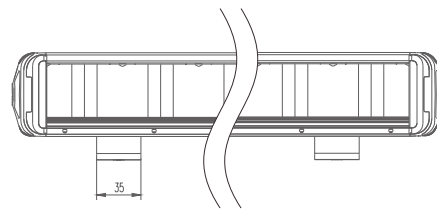

MODEL	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Cable Length	Net Weight	Package Standard
GT-BS01A-4L	11.60"	48W	3.34A@12V, 1.67A@24V	4PCS*12W	5200Lm	400mm	1.10Kg/Pcs	8Pcs/Carton
GT-BS01A-8L	21.03"	96W	6.67A@12V, 3.34A@24V	8PCS*12W	10400Lm	600mm	1.90Kg/Pcs	4Pcs/Carton
GT-BS01A-12L	30.49"	144W	10.00A@12V, 5.00A@24V	12PCS*12W	15600Lm	800mm	3.23Kg/Pcs	2Pcs/Carton
GT-BS01A-16L	40.08"	192W	13.33A@12V, 6.67A@24V	16PCS*12W	20800Lm	800mm	3.80Kg/Pcs	2Pcs/Carton
GT-BS01A-20L	49.53"	240W	16.60A@12V, 8.33A@24V	20PCS*12W	26000Lm	800mm	4.56Kg/Pcs	2Pcs/Carton

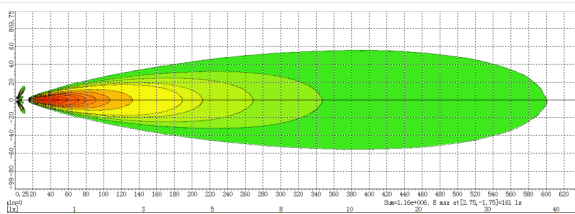

1x@600meters(8L)

