




# MODEL: GT-BS02

Oder Code	GT-BS02
LED	5W/Pcs Osram
Row	Single Row
Optic System	Side Emitting Reflector
Operating Voltage	10-30V DC
Operating Temp	-40~+60 °Celcius
Beam Pattern	Driving Light Beam
ColorTemperature	6000K
Lifetime	30000+h
Lens Material	Polycarbonate
Housing Material	Aluminum
Housing Height	40.7mm
Coating Powder	Sand Black
Mounting System	304 Stainless Steel Side Mount Aluminum Bottom Mount
Pressure Equalization Vent	Yes
Waterproof Rate	IP67
EMC Protection	ECE R10, CISPR 25 Class 3
Beam Type Protection	ECE R112

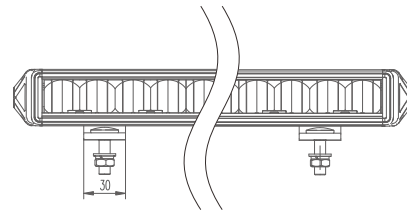

MODEL	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Cable Length	Net Weight	Package Standard
GT-BS02-8L	9.76"	40W	2.00A@12V, 1.00A@24V	8PCS*5W Osram	3000Lm	400mm	0.65Kg/Pcs	10Pcs/Carton
GT-BS02-12L	13.78"	60W	3.00A@12V, 1.50A@24V	12PCS*5W Osram	4500Lm	600mm	1.00Kg/Pcs	8Pcs/Carton
GT-BS02-16L	17.81"	80W	4.00A@12V, 2.00A@24V	16PCS*5W Osram	6000Lm	800mm	1.35Kg/Pcs	6Pcs/Carton
GT-BS02-24L	25.87"	120W	6.00A@12V, 3.00A@24V	24PCS*5W Osram	8400Lm	800mm	1.93Kg/Pcs	4Pcs/Carton
GT-BS02-32L	33.94"	160W	8.00A@12V, 4.00A@24V	32PCS*5W Osram	11200Lm	800mm	2.49Kg/Pcs	2Pcs/Carton
GT-BS02-40L	42.00"	200W	10.00A@12V, 5.00A@24V	40PCS*5W Osram	14000Lm	800mm	3.06Kg/Pcs	2Pcs/Carton

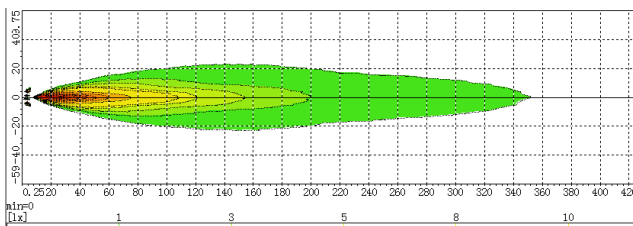

1lx@352meters(12L)

