


MODEL: GT-BS04A

Oder Code	GT-BS04A
LED	1W/Pcs
Row	Single Row
Operating Voltage	10-30V DC
Operating Temp	-40~+60 °Celcius
Beam Pattern	Flood
Color Temperature	6000K
Lifetime	30000+h
Lens Material	Polycarbonate
Housing Material	Aluminum
Coating Powder	Sand Black
Mounting System	304 Stainless Steel Side Mount
Waterproof Rate	IP67
EMC Protection	ECE R10, CISPR 25 Class 3




Plastic Decorative Part:

Different Colors Are Available

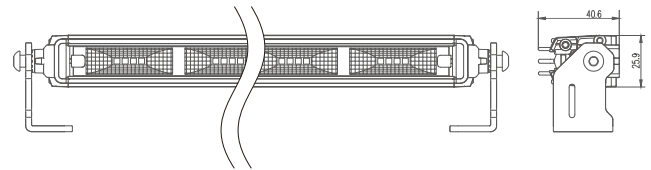

MODEL	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Cable Length	Net Weight	Package Standard
GT-BS04A-12L	7.78"	12W	1.00A@12V, 0.50A@24V	12PCS*1W Osram	1600Lm	400mm	0.28Kg/Pcs	28Pcs/Carton
GT-BS04A-24L	13.90"	24W	2.00A@12V, 1.00A@24V	24PCS*1W Osram	3200Lm	400mm	0.50Kg/Pcs	18Pcs/Carton
GT-BS04A-48L	26.20"	48W	4.00A@12V, 2.00A@24V	48PCS*1W Osram	6300Lm	600mm	0.80Kg/Pcs	10Pcs/Carton
GT-BS04A-60L	32.35"	60W	5.00A@12V, 2.50A@24V	60PCS*1W Osram	7900Lm	800mm	0.97Kg/Pcs	10Pcs/Carton
GT-BS04A-72L	38.49"	72W	6.00A@12V, 3.00A@24V	72PCS*1W Osram	9500Lm	800mm	1.14Kg/Pcs	6Pcs/Carton
GT-BS04A-84L	44.63"	84W	7.00A@12V, 3.50A@24V	84PCS*1W Osram	11100Lm	800mm	1.32Kg/Pcs	6Pcs/Carton

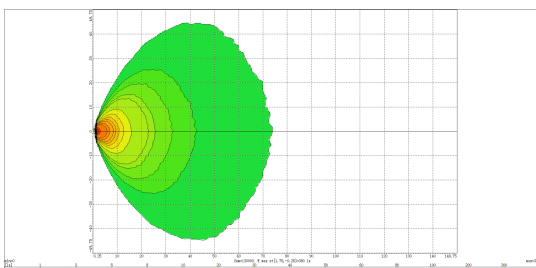

1lx@61meters

